

Photometrics Pro

Luminaire Photometric Report

- [Evaluation Version]

Filename: C4658L HTS-8R

Manufacturer: BARE DEVELOPMENT

Luminaire: LIGHT BOARD LED

Luminaire Cat: C4658L PN LRP88

Lamp: LED

Lamp Cat: NA. LUMINAIRE OUTPUT = 6910 LMS

Lamp Output: 1 lamp(s), rated Lumens/lamp: 6910

Max Candela: 1,856.5 at Horizontal: 180°, Vertical: 2.5°


Input Wattage: 94.4

Luminous Opening: Rectangle (L: 0.83ft, W: 0.6ft)

Test Lab: Intertek

Photometry : Type C

CIE Class: Direct

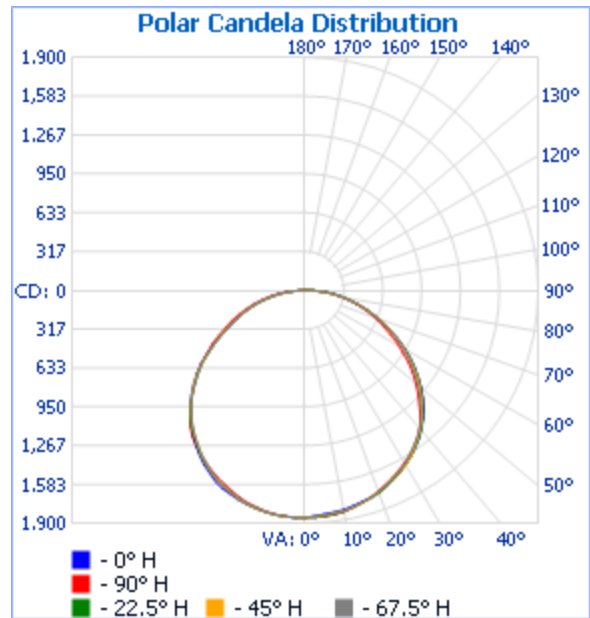

Roadway Summary

Cutoff Classification:	CUTOFF	
Distribution:	Type VS	
Max Cd, 90 Deg Vert:	27.9	
Max Cd, 80 to <90 Deg:	309.5	
	Lumens	% Lamp
Downward Street Side:	2,912.2	42.1%
Downward House Side:	2,797.6	40.5%
Downward Total:	5,709.8	82.6%
Upward Street Side:	1.7	0%
Upward House Side:	0.4	0%
Upward Total:	2.2	0%
Total Lumens:	5,711.9	82.7%

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	1,467.8	21.2%	25.7%
0-40	2,436.2	35.3%	42.7%
0-60	4,394.3	63.6%	76.9%
60-90	1,314.3	19%	23%
0-90	5,708.6	82.6%	100%
90-180	2.2	0%	0%
0-180	5,710.7	82.6%	100%





Efficiency Total: 82.6%

Flood Summary

	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%):	81.6%	5,641.0	167.9	167.5
Beam (50%):	61.9%	4,274.1	116	117.7
Total:	82.6%	5,708.7		

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	175.9	3.1%	90-100	2.2	0%
10-20	508.3	8.9%	100-110	0	0%
20-30	783.6	13.7%	110-120	0	0%
30-40	968.4	17.0%	120-130	0	0%
40-50	1,026.1	18.0%	130-140	0	0%
50-60	932.0	16.3%	140-150	0	0%
60-70	713.4	12.5%	150-160	0	0%
70-80	448.5	7.9%	160-170	0	0%
80-90	152.3	2.7%	170-180	0	0%

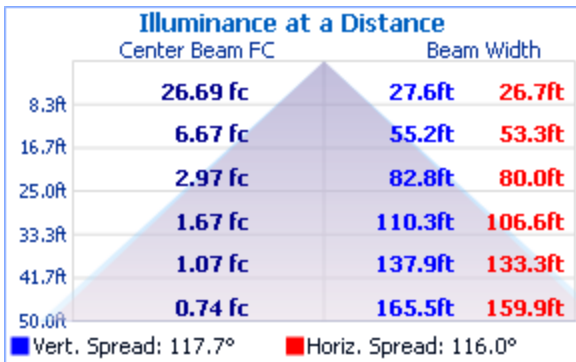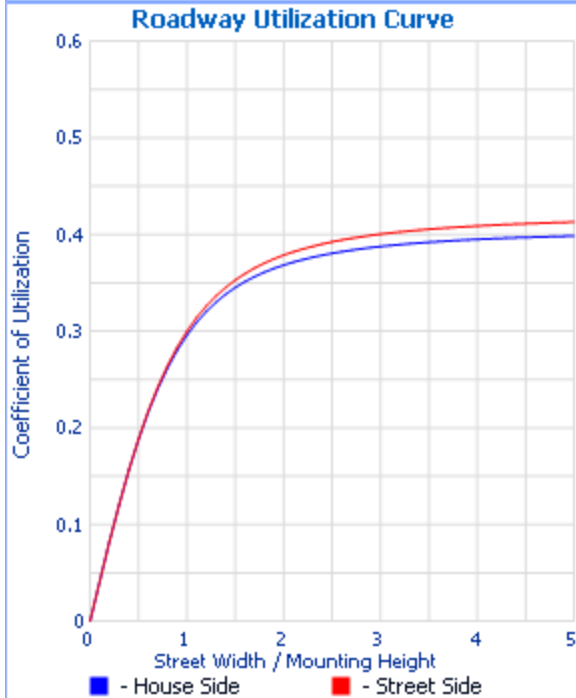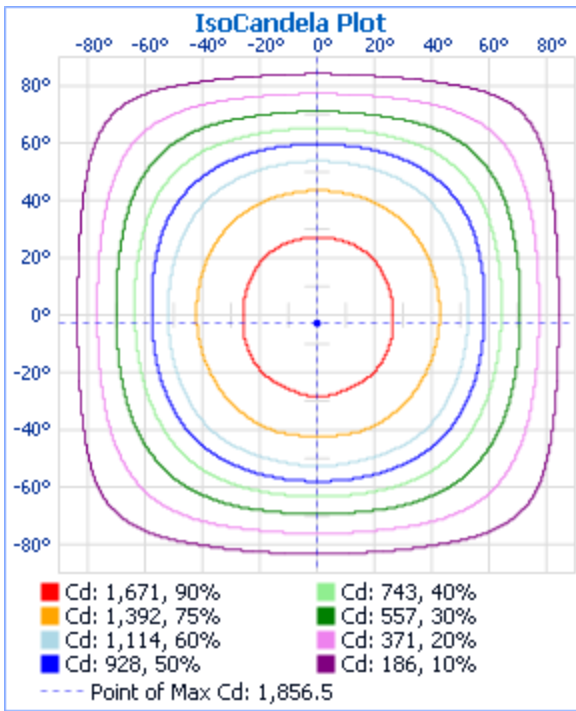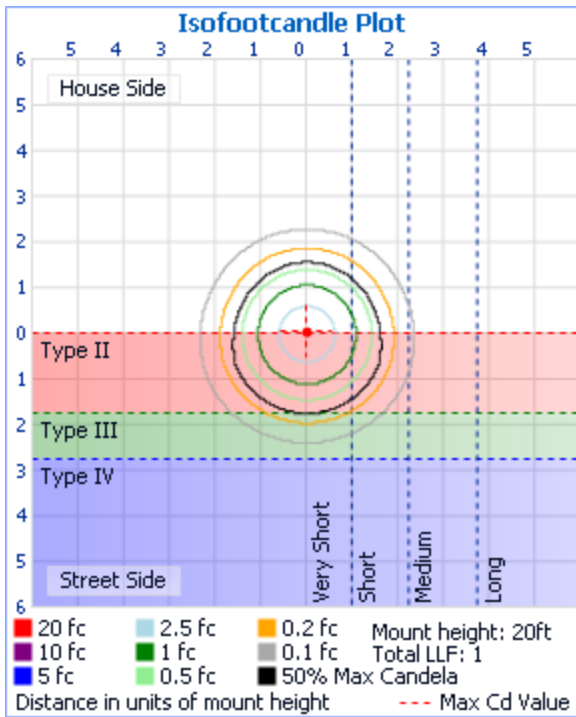

Photometrics Pro - Evaluation Version

Photometrics Pro - Evaluation Version

Candela Table - Type C

	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	360
0	1854	1854	1854	1854	1854	1854	1854	1854	1854	1854	1854	1854	1854	1854	1854	1854	1854
2.5	1843	1855	1850	1846	1854	1854	1853	1855	1856	1855	1853	1854	1854	1846	1850	1855	1843
5	1832	1850	1843	1841	1849	1853	1853	1853	1853	1853	1853	1853	1849	1841	1843	1850	1832
7.5	1826	1842	1833	1836	1844	1846	1847	1847	1847	1847	1847	1846	1844	1836	1833	1842	1826
10	1817	1831	1825	1828	1832	1834	1836	1839	1836	1839	1836	1834	1832	1828	1825	1831	1817
12.5	1802	1812	1812	1812	1814	1821	1824	1827	1824	1827	1824	1821	1814	1812	1812	1812	1802
15	1786	1793	1795	1791	1796	1804	1809	1809	1812	1809	1809	1804	1796	1791	1795	1793	1786
17.5	1773	1780	1776	1775	1772	1782	1789	1787	1794	1787	1789	1782	1772	1775	1776	1780	1773

155	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
157.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
160	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
162.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
165	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
167.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
172.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
175	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
177.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Photometrics Pro - Evaluation Version

Luminaire Report Summary

IESNA:LM-63-2002
 [TEST]
 [TESTLAB]Intertek
 [ISSUEDATE] 4/23/2010
 [MANUFAC]BARE DEVELOPMENT
 [LUMCAT]C4658L PN LRP88
 [LUMINAIRE]LIGHT BOARD LED
 [LAMP]LED
 [LAMPCAT]NA. LUMINAIRE OUTPUT = 6910 LMS
 [OTHER]24.005V, 3.1786A, 94.40W
 FILE: CANDELA MULTIPLIER: 1
 FILE: VERTICAL ANGLES: 73, HORIZONTAL ANGLES: 17
 FILE: COORDINATE SYSTEM: TYPE C
 FILE: UNIT OF MEASURE: STANDARD
 FILE: BALLAST FACTOR: 1

Photometrics Pro 1.3.8 - (Evaluation Version) copyright 2003-2009 by jSolutions, Inc.
 Reported data calculated from manufacturer's data file, based on IES recommended methods.